

LEGEND AND PLANT LIST

QTY.	COMMON NAME	BOTANICAL NAME	SIZE/COND.	SPACING	REMARKS
15	Hollywood Juniper	Juniperus chinensis (Hollywood)	15 Gal. 5' -6' Ht.	As Shown	Full/Dense
8	Sea Green Juniper	Juniperus spp.	3 Gal. Cont.	4' O.C.	Dense
18	Pink Muhly Grass	Muhlenbergia capilaris	3 Gal. Cont.	3' O.C.	
18	Blanketflower	Perennial Gaillardia	1 Gal. Cont.	2' O.C.	Staggered Rows

Seed Mix A

8 ounces	Coreopsis	Coreopsis lanceolata
8 ounces	Gaillardia pulchella	Indian Blanket
8 ounces	Purple coneflower	Purple coneflower

Seed Mix B (Typical)

8 ounces	Black eyed susan	Rudbeckia hirta
8 ounces	Goldenrod	Solidago sempervirens
8 ounces	Milkweed	Asclepias tuberosa
	White Yarrow	Achellia millefolium

Seed Mix B areas to receive 2,000 American Beach Grass plugs spaced at 3' on center.
Fertilize Seed Mix areas with 40 lbs. 5-10-10 fertilizer at planting.

NOTES

ALL PLANTS SHALL MEET MINIMUM STANDARDS OUTLINED IN THE AMERICAN STANDARDS FOR NURSERY STOCK, (LATEST EDITION) PUBLISHED BY THE AMERICAN ASSOCIATION OF NURSERMEN, INC.

PLANTS SHALL BE SOUND, HEALTHY AND VIGOROUS, BE WELL BRANCHED AND DENSELY FOLIATED WHEN IN LEAF. PLANTS SHALL BE FREE OF DISEASE, PESTS, EGGS/LARVAE AND THEY SHALL BE FREE OF DAMAGE. DAMAGE INCLUDES, BUT IS NOT LIMITED TO SCRAPES ON THE BARK OR EVIDENCE OF GIRDLING FROM WIRE OR OTHER STAKING/BINDING MATERIAL.

CONTAINER PLANTS SHALL BE FREE OF SEVERE ROOT BOUND CONDITIONS. CONTRACTOR TO LIGHTLY SCARIFY/LOOSEN OUTER ROOTS AT TIME OF PLANTING.

ALL PLANTS SHALL BE PURCHASED FROM BONA-FIDE WHOLESALE NURSERIES AND/OR GROWERS.

PLANTS SHALL BE COVERED BY TARP OR WITHIN ENCLOSED TRUCK DURING TRANSPORT TO SITE.

SUBSTITUTIONS SHALL BE APPROVED BY THE OWNER OR THEIR DESIGNATED REPRESENTATIVE.

DESIGNATED MULCH AREAS TO BE MULCHED WITH A 4" DEPTH OF CLEAN, UN-DYED, TRIPLE SHREDDED HARDWOOD MULCH.

PLANT QUANTITIES SHOWN IN PLANTING LIST IS FOR CONTRACTOR CONVENIENCE ONLY. IT IS THE CONTRACTORS RESPONSIBILITY TO OBTAIN QUANTITIES BASED ON PLANTS SHOWN ON THE DRAWINGS.

ANY EXISTING TREES AND PHYSICAL IMPROVEMENTS ARE SHOWN FOR REFERENCE ONLY. ADDITIONAL TREES/IMPROVEMENTS NOT SHOWN MAY EXIST ON SITE.

ALL PLANTS TO RECEIVE A SOIL ADDITIVE AT TIME OF PLANTING. SOIL ADDITIVE SHALL CONSIST OF ONE PART TOPSOIL TO ONE PART SAND. BOTH SAND AND TOPSOIL SHALL BE FREE OF ROOT, ROCKS OR OTHER MATERIAL AND SHALL BE THOROUGHLY MIXED PRIOR TO PLANTING.


ALL PLANTS TO BE LIGHTLY TAMPED AFTER PLANTING TO ELIMINATE AIR POCKETS AND TO FIRMLY STABILIZE PLANTING.

ALL MULCHED LANDSCAPE BEDS TO BE BORDERED BY A TRENCHED EDGE.

ALL LANDSCAPED BEDS TO RECEIVE A 1 FOOT DEPTH OF CLEAN SAND PRIOR TO PLANTING.


CONTRACTOR TO WARRANTY PLANTS FOR ONE YEAR.

CONTRACTOR TO LOCATE ALL UTILITY SERVICE LINES (INCLUDING WATER) THAT SERVICE BUILDINGS PRIOR TO DEMOLITION/PLANTING.

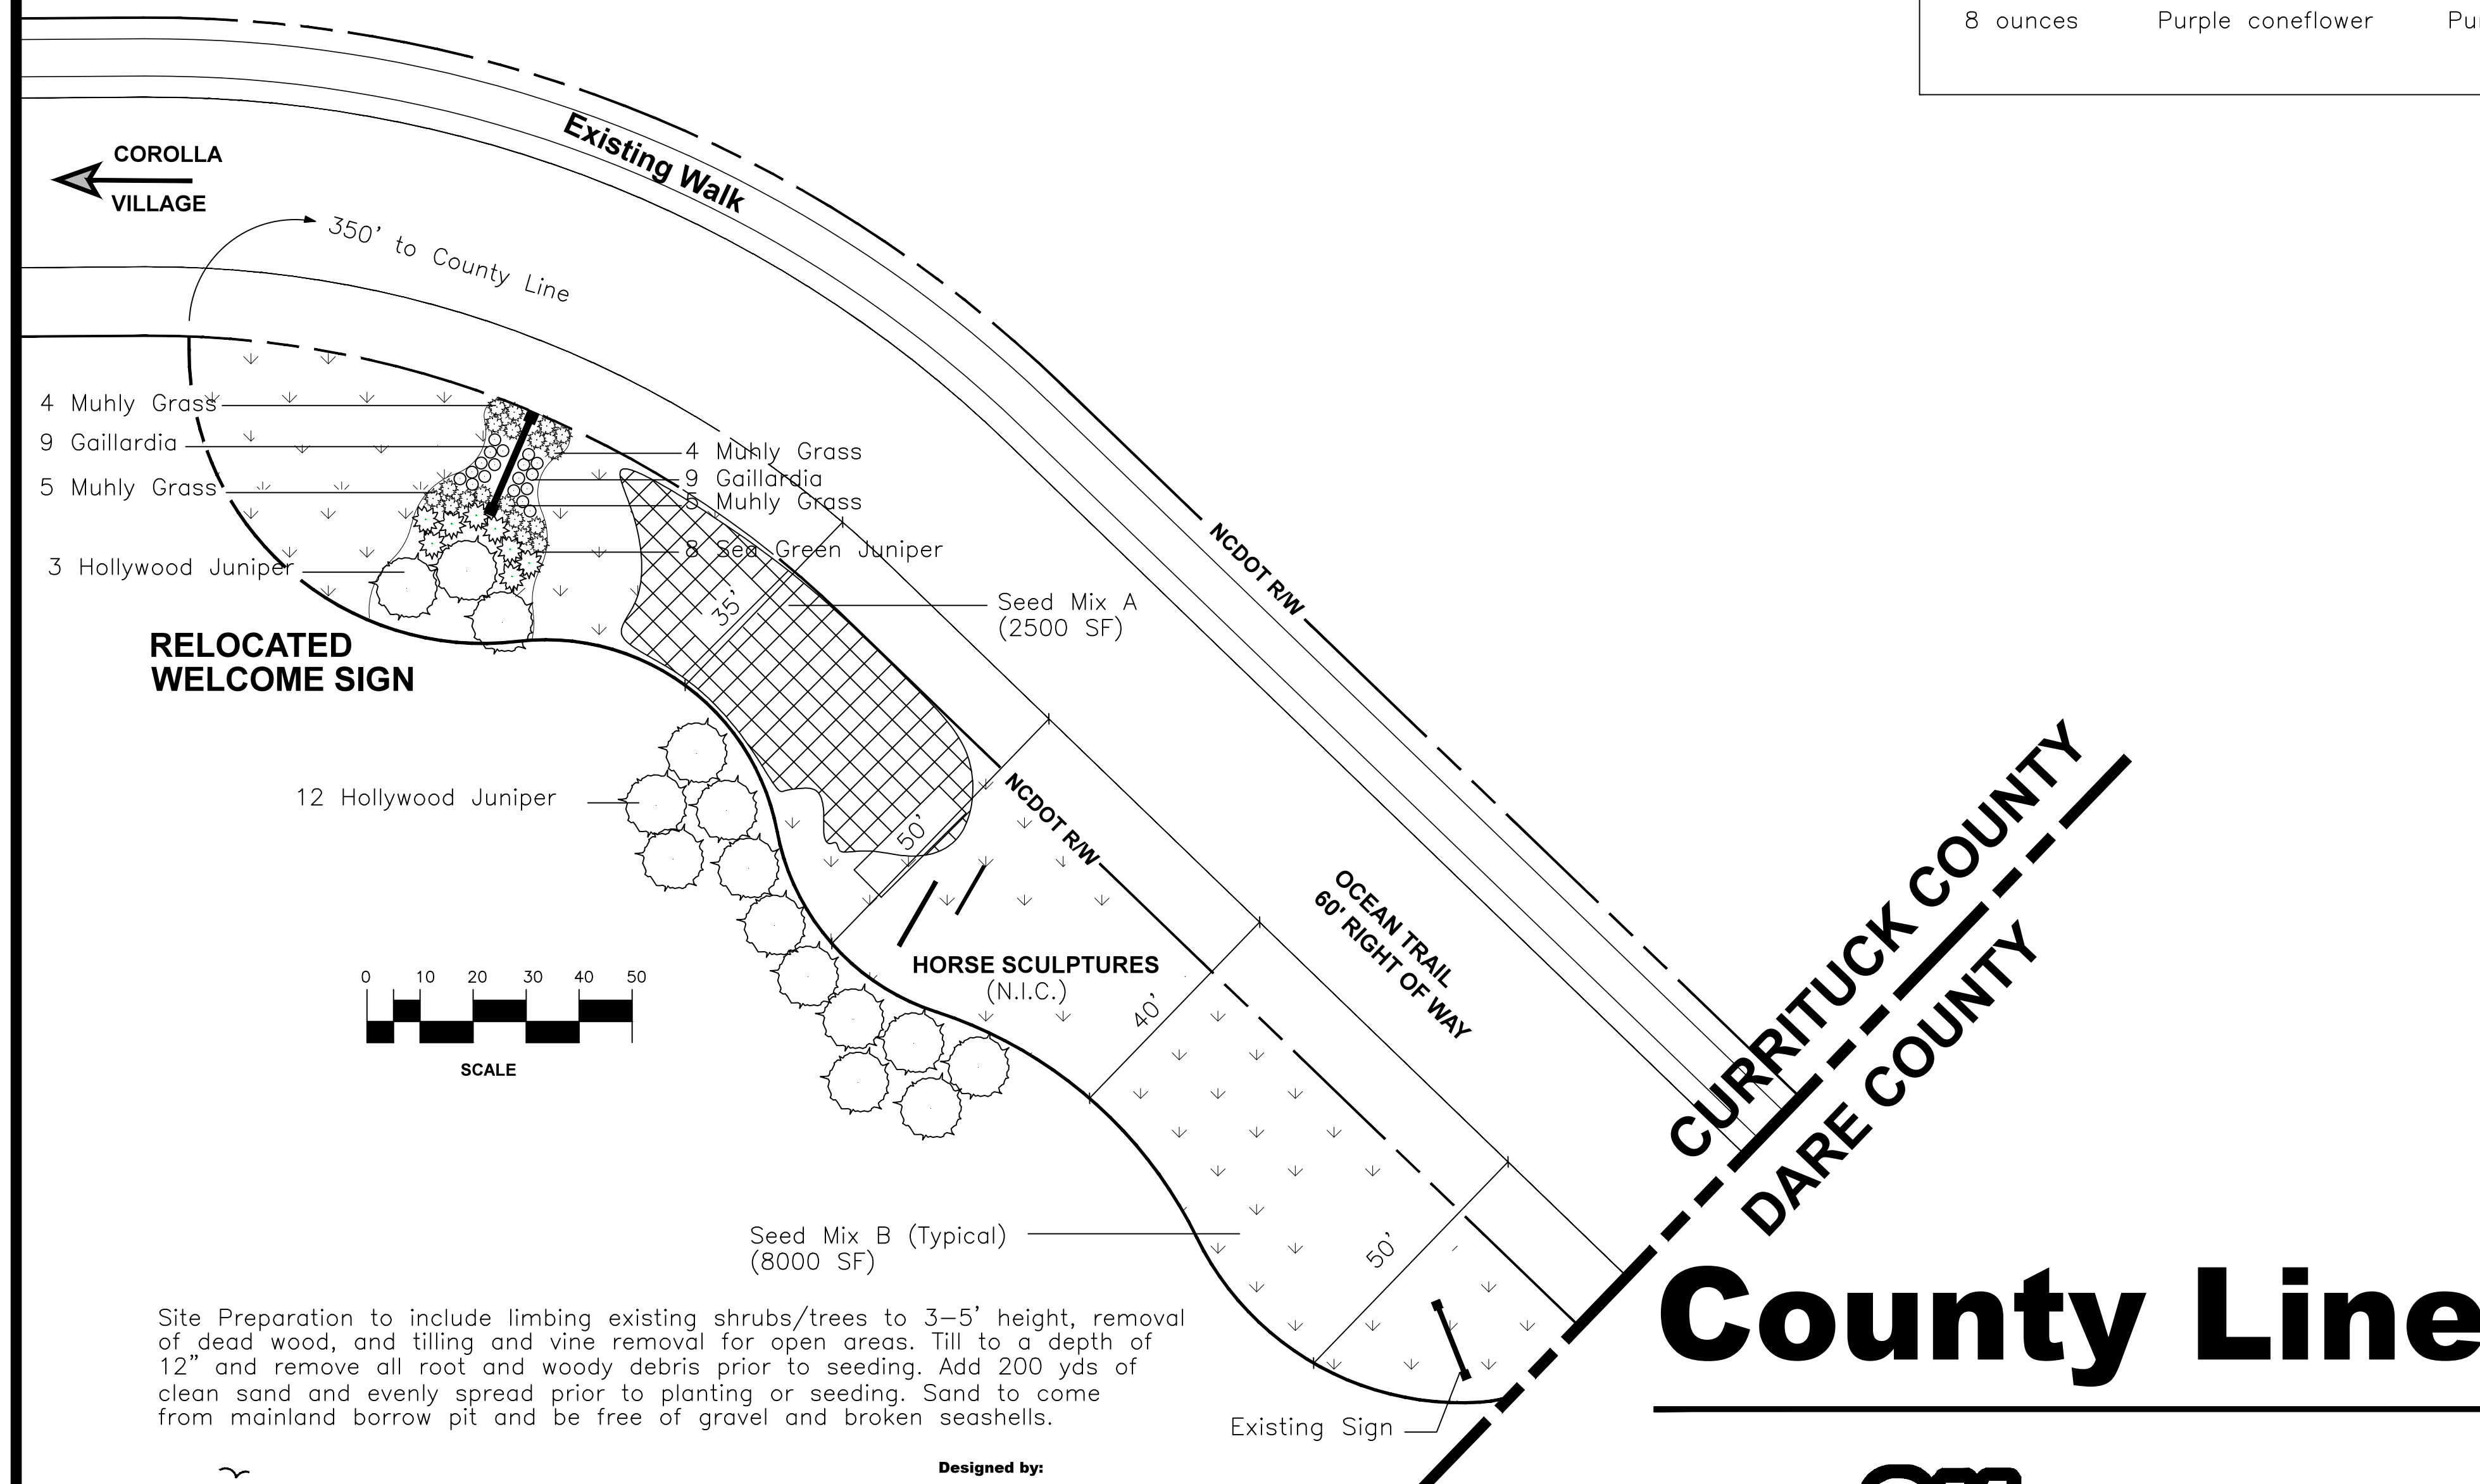

Site Preparation to include limbing existing shrubs/trees to 3-5' height, removal of dead wood, and tilling and vine removal for open areas. Till to a depth of 12" and remove all root and woody debris prior to seeding. Add 200 yds of clean sand and evenly spread prior to planting or seeding. Sand to come from mainland borrow pit and be free of gravel and broken seashells.

Designed by:

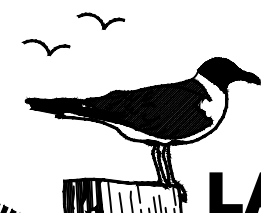

LAUGHING GULL DESIGN STUDIO


LANDSCAPE ARCHITECTURE • LANDPLANNING • ENVIRONMENTAL CONSULTING

KITTY HAWK, NORTH CAROLINA 27949
PHONE (252) 261-8747

Greenspace

Landscape
Planning &
Design

Nags Head, NC 27959
252-573-9346

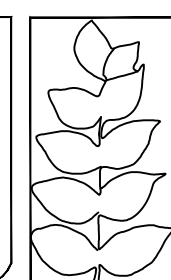

Know what's below.
Call before you dig.



Currituck

ISSUED FOR BID

**Corolla Beautification Project
Currituck County, North Carolina**

October 1, 2017

rev. 10/20/17, 10/27/17 DWG CBP 1